


Radio Link outdoor LC-Uniboot switchable/LC-Duplex cable assembly SM9/125 OS2

RL - FO Cable Assembly 2 x 09/125 OS2, LC Uniboot/LC duplex, type S, FRPU

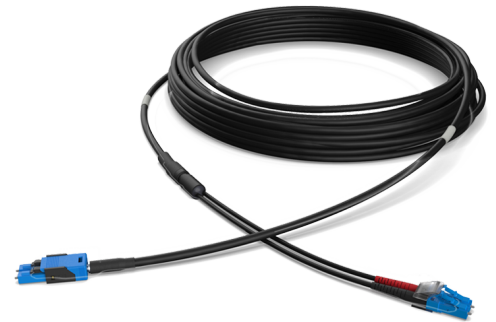

SPECIFICATION

Fiber quantity	2 fibers
Cable design	Round dielectric cable
Cable Outer Diameter, mm	4,8 mm
Fiber type	SM 9/125 OS2
Connector, Side A	LC-Uniboot switchable
Connector, Side B	LC Duplex
Polarity	Type S (straight, A-B/B-A)
Loss Category	SM, Standard Loss
Fire safety	IEC 60332-1

Part Numbers

81109001	RL - FO Cable Assembly 2 x 09/125 OS2, LC Uniboot/LC duplex, type S, FRPU, 30 m
81109002	RL - FO Cable Assembly 2 x 09/125 OS2, LC Uniboot/LC duplex, type S, FRPU, 50 m
81109003	RL - FO Cable Assembly 2 x 09/125 OS2, LC Uniboot/LC duplex, type S, FRPU, 70 m
81109004	RL - FO Cable Assembly 2 x 09/125 OS2, LC Uniboot/LC duplex, type S, FRPU, 100 m
81109005	RL - FO Cable Assembly 2 x 09/125 OS2, LC Uniboot/LC duplex, type S, FRPU, 150 m